

OPA 430RKTB

Packaged Reverse Cycle R410A Air Cooled Air Conditioner

Installation & Maintenance

GENERAL

This OPA 430RKTB unit must be installed in accordance with all national and local safety codes.

CONFIGURATIONS

The OPA 430RKTB is supplied in one of two standard configurations :

1. Horizontal supply/return air with box mounting channel (RKTBH), or
2. Downward supply/return air with box mounting channel (RKTBU).

REFRIGERATION SYSTEM

General

The OPA 430 has two independent refrigeration circuits and two compressors to provide the flexibility and economy of two stage operation, i.e. utilising one or two circuits as conditions vary, plus the advantage of staggered starting.

Each refrigeration system has been charged with 3.7 kg each of HFC-410A (R410A) refrigerant. Tapping points are provided to measure discharge and suction operating pressures.

Compressors

The compressors are directional scroll type. The compressor lubricant is polyol ester oil (POE). Note, this oil absorbs moisture quickly if exposed to open air. On commissioning, the compressors must be checked for correct rotation (refer Start Up Procedure). A delay 'on make' timer prevents simultaneous starting of the compressors.

ECONOMISER (Option)

If the outdoor air temperature or heat content preferably, is below that of the return air the fresh air damper opens and the return air damper closes to provide the first stage of cooling. The fresh air damper should return to minimum setting and the return air damper open before compressors are allowed to operate to provide further cooling. A low limit thermostat is fitted to prevent compressors operating with a mixed air-on coil temperature below 18°C; resets at 20°C. This is by-passed during heating mode.

INSTALLATION

Positioning

Refer to dimension diagrams for minimum clearances. If multiple units are to be placed side-by-side then allow at least 2 m between coil faces.

Mounting

The unit should be fastened to a firm flat horizontal base using the holes supplied in the mounting channels.

When the unit is being installed on a roof it is recommended that the unit is installed on a substantial structure with vibration isolating springs beneath the unit. These springs are not supplied with the unit. Two channels are provided under the base for spring mounts or bolting down.

Flexible duct connections are recommended between the supply and return ducts and the unit.

Condensate Drain

The condensate drain should be 'U' trapped outside the unit. The trap should have a Downward height of at least 100 mm. The drain should have a slope of at least 1 in 50 and must not be piped to a level above the unit drain pipe (see figure 3).

Electrical Requirements

Electrical work must be done by a qualified electrician. The outdoor unit must be wired directly from a distribution board by means of a circuit breaker or H.R.C. fuse, and a mains isolator provided - preferably close to the unit.

Note: DO NOT USE REWIRABLE FUSES.

The OPA 430 is provided with a 24V AC control circuit for a thermostat, on/off switch and/or time clock.

The control transformer 240V primary voltage is used for countries with 230-240V power supply. For countries with supply voltages 200-220V, change the primary voltage on the transformer to 208V.

Standard units are suitable for use with thermostats with either manual Heat/Cool selection or automatic changeover subject to the contact ratings of the thermostats.

A 24 hour power supply to the compressor crank case heaters is required, otherwise the warranty is void.

CHECK TESTS

1. Leave the on/off switch in the off position and close the mains isolating switch. A four hour delay period is required to allow the crankcase heaters to drive any liquid refrigerant out of the compressor oil.
2. Check that all the shipping blocks beneath both compressors have been removed and that the compressor is secure on its mounts.
3. Check that all fan motors are free running.

4. Check that the thermostat is correctly wired to the unit and is set at the desired temperature.
5. Check that the air filters have been correctly installed if fitted.
6. Check air diffuser dampers are open if appropriate.

START UP PROCEDURE

Use the supplied Commissioning Sheet to help you complete the following procedure:

1. After the four hour delay period has expired, switch on the unit.
2. Check the supply voltage between each phase and neutral.
3. Compressors fitted are directional. Check for correct rotation. If rotation is incorrect the compressor will not pump, be noisy, and will draw minimal current. To correct motor rotation, change the phasing at the main power terminal. If changing the phasing, check the indoor air fan then runs in the correct direction also.
4. Measure the current draw on each phase to the compressor motors and measure the current draw of each fan motor. Check all readings against the specified values in the wiring diagram.
5. Fit R410A compatible gauges and measure the suction and discharge pressures of both refrigeration circuits.
6. Check that the outdoor air fan motors are running smoothly.
7. Test the operation of the reversing valve by running the unit in both the heating and cooling mode.
8. Check the indoor unit's fan belt tension after 20 mins of operation and adjust if necessary (refer Commissioning Sheet).
9. Check the supply air flow at each outlet.
10. Check the tightness of all electrical connections and sign the check label.
11. Touch up any outdoor unit paintwork damage to prevent corrosion.

SETTING SUPPLY AIR FLOW

Consult OPA 430 Technical Data pamphlet for details of airflow/duct static pressure, if required.

If the indoor air returning to the unit is regularly expected to be above 50%RH, then the coil face velocity should be limited to be 2.5 m/s or less (refer Air Handling graph in Technical Data pamphlet).

High humidity levels can occur in tropical or subtropical conditions, and/or when heavily moisture laden fresh air is introduced.

Select a fan speed that avoids water carry-over problems.

In a free blow or low resistance application, beware of exceeding the fan motor's full load amp limit (refer wiring diagram).

The indoor air fan motor is fitted with a factory set adjustable pitch pulley. Instructions for the adjustment of pulleys is included on the back page of the supplied Commissioning Sheet. One revolution of adjustment is equal to approx. 7% change in air volume flow rate.

OUTDOOR UNIT CONTROLLER (OUC)

The Outdoor Unit Controller (OUC) includes a temperature sensing head pressure control which enables the system to compensate for outdoor ambient temperatures below 20°C on cooling cycle, and above 15°C on heating cycle. The OUC also has features which protect against icing or overheating of coils, rapid cycling of the compressor and loss of refrigerant charge.

If the outdoor air fans take some time to begin rotating when the system is powered on, or they don't appear to be rotating appropriately while the compressor is running, consult the OUC label on the electrical box. If necessary, refer to **temperzone** for further diagnostic information.

MAINTENANCE

Monthly

1. Check air filters, if fitted, and vacuum or wash clean as necessary.
2. Check condensate drain for free drainage.
3. Check compressor compartment for oil stains indicating refrigerant leaks.

Three Monthly (or every 1200 hrs of operation)

Check the indoor unit's fan belt tension and adjust if necessary.

Six Monthly

1. Check the tightness of electrical connections.
2. Check the tightness of fans, motor mountings, pulleys and belt tension.
3. Check suction and discharge operating pressures.
4. Replace indoor air filters (if fitted).
5. Check condensate drain for free drainage.

Yearly

1. Check all refrigerant piping for chafing and vibration.
2. Check the operation of electric heaters, if fitted.
3. Check air supply at all diffusers.
4. Check for excessive noise and vibration and correct as necessary.
5. Check for insulation and duct damage and repair as necessary.
6. Remove lint and dust accumulation from outdoor coil fins.
7. Touch up any paintwork damage to prevent corrosion.

NOTE


The manufacturer reserves the right to make changes in specifications at any time without notice or obligation. Certified data is available on request.

This pamphlet replaces the previous issue no. 2943 dated 08/08. Fig.1 R/A spigot dim.


DIMENSIONS (mm)

Fig. 1 OPA 430RKTBH – Horizontal Supply & Return Air

OPA 430RKTB





Not to Scale

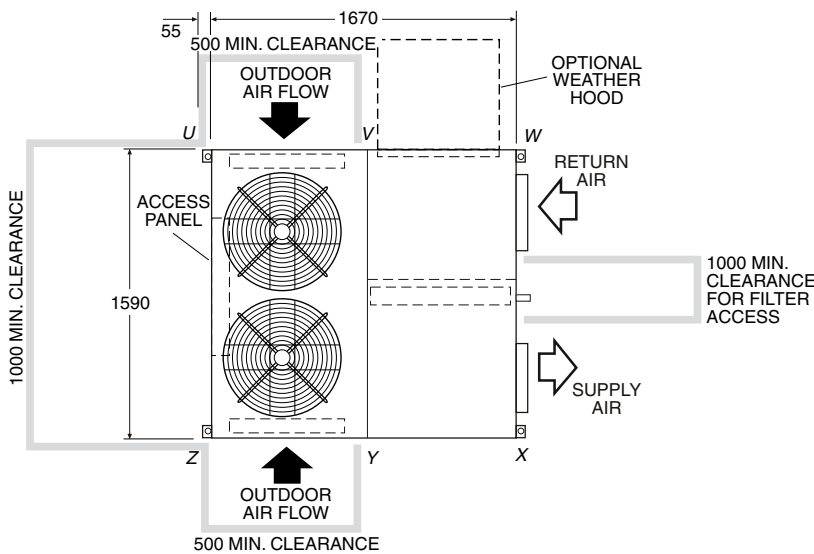

POINT LOADS (kg)					
U	V	W	X	Y	Z
97	90	90	99	99	108

Net Weight 583 kg


Note : A 2 m clearance is required above the exhaust air fans

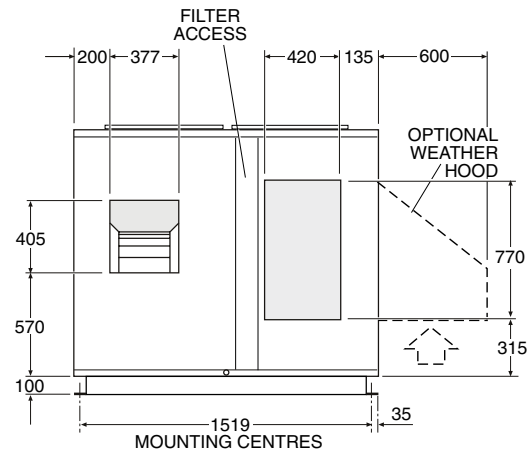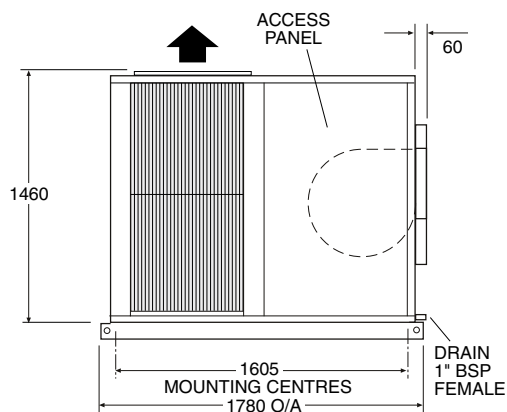

DIMENSIONS (mm)

OPA 430RKTB

Fig. 2 OPA 430RKTBU – Downward Supply & Return Air



Not to Scale

Note:
Supply and return air spigots are shipped loose inside the return air cavity.


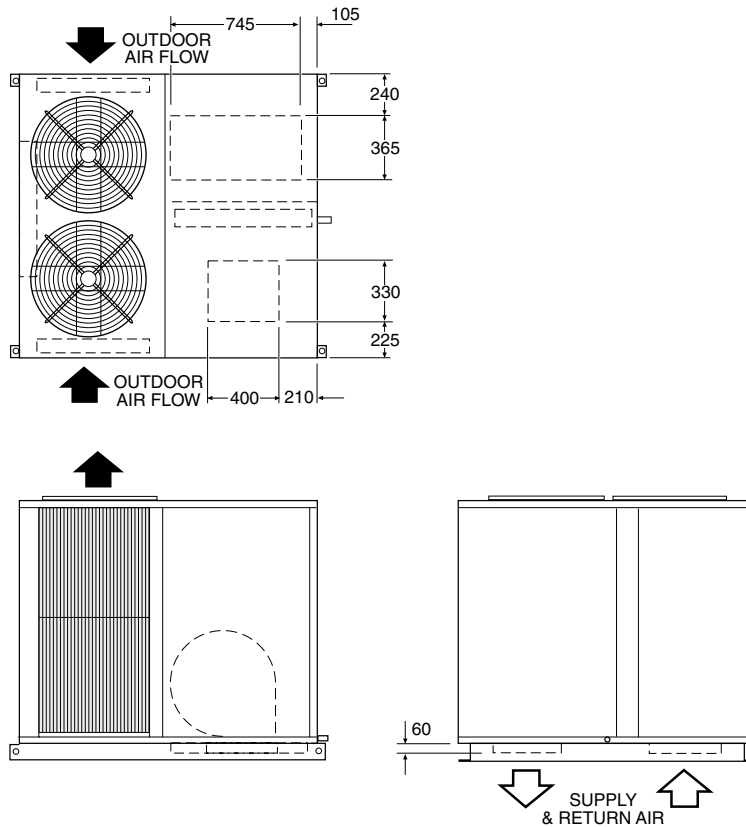


Fig. 3 Condensate Drain

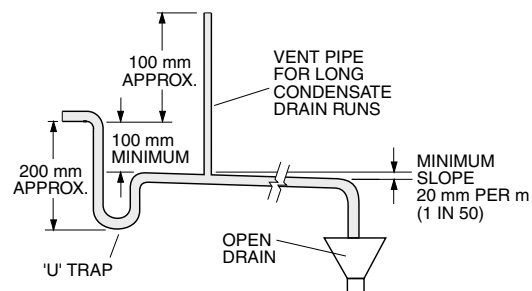

CAPACITIES — NET to AS/NZS 3823

COOLING —	kw	40.80
HEATING — REVERSE CYCLE	kw	42.50
ELECTRICAL INPUT		
COOLING —	kw	14.00
HEATING — REVERSE CYCLE	kw	11.73
E.E.R. (COOLING)	kw/kw	2.914

SUPPLY REQUIRED 3ph 342-436V ~ 50Hz
INCLUDING VOLTAGE FLUCTUATION LIMITS

COMPRESSOR (3Ph) RUN AMPS RATED CONDITIONS	A/Ph	12.0 x2
INDOOR FAN MOTOR (3Ph)	kw	2.2
INDOOR FAN MOTOR (3Ph) FULL LOAD AMPS	A	4.9
OUTDOOR FAN MOTOR (1Ph) FULL LOAD AMPS	A	1.7 x2
OUTDOOR MOTOR CAPACITOR	MFD	5 x 2
RUNNING AMPS (TOTAL)	A	27/27/30
RECOMMENDED EXTERNAL FUSE SIZE	A/Ph	50
ELECTRIC HEAT OPTION	9 kw TOTAL	A/Ph 13
RECOMMENDED EXTERNAL FUSE SIZE WITH ELECTRIC HEAT OPTION	A/Ph	60
WEIGHT—NETT OPA 430RKT	Kg	583
REFRIGERANT — R410A		
COMPRESSOR TYPE : SCROLL		
OIL TYPE : POLYOLESTER (P.O.E.)		
AP5 AIR PRESSURE SWITCH	HR2 HEATING RELAY 2	
CAP CAPACITOR	HRC HEATING RELAY COIL	
CB CIRCUIT BREAKER	HR2C HEATING RELAY 2 COIL	
CCH CRANKCASE HEATER	HP HIGH PRESSURE SWITCH	
CLT COMPRESSOR LOW LIMIT T'STAT	HST HIGH TEMP. SAFETY	
CM COMPRESSOR MOTOR	IFC INDOOR FAN CONTACTOR	
CMC COMPRESSOR CONTACTOR	IFCC INDOOR FAN CONTACTOR COIL	
CMCC COMPRESSOR CONTACTOR COIL	IFM INDOOR FAN MOTOR	
CMOL COMPRESSOR OVERLOAD	IFOL INDOOR FAN OVERLOAD	
CR COMPRESSOR RELAY 24 V CONTROL	LAT LOW AMBIENT T/STAT	
CRC COMPRESSOR RELAY COIL 24V	LP LOW PRESSURE SWITCH	
DMF DAMPER MOTOR FRESH AIR	MST MANUAL HI TEMP SAFETY	
DMR DAMPER MOTOR RETURN AIR	OFM OUTDOOR FAN MOTOR	
DO TIME DELAY 30 SEC. DELAY ON MAKE	OUC OUTDOOR UNIT CONTROLLER	
DR DE-ICE RELAY	PRC PHASE ROTATION CONTROL	
DRC DE-ICE RELAY COIL	PRR PHASE ROTATION RELAY	
EHC ELECTRIC HEAT CONTACTOR	PRRC PHASE ROTATION RELAY COIL	
EHC2 ELEC.HEAT CONTACTOR COIL	RCV REVERSE CYCLE VALVE	
F INDOOR FAN CONTROL	Ⓢ DE-ICE INHIBIT LEAD	
FR INDOOR FAN CONTROL RELAY		
FRC INDOOR FAN CONTROL RELAY COIL		
HR HEATING RELAY		

Consult Outdoor Unit Controller label for further details, or refer to Temperzone for fault diagnosis information.

Sensor Locations


R410A

Red to service valve pipe pocket.
Yellow to coil return bend pocket.
Blue to bottom of coil in fins.

Title
OPA 430RKT B
WIRING SCHEMATIC

temperzone

Drawn D.A.B	Date 31-10-06	Drawing No. 556-564-002	Revision
Scale	Aprvd <i>[Signature]</i>		A

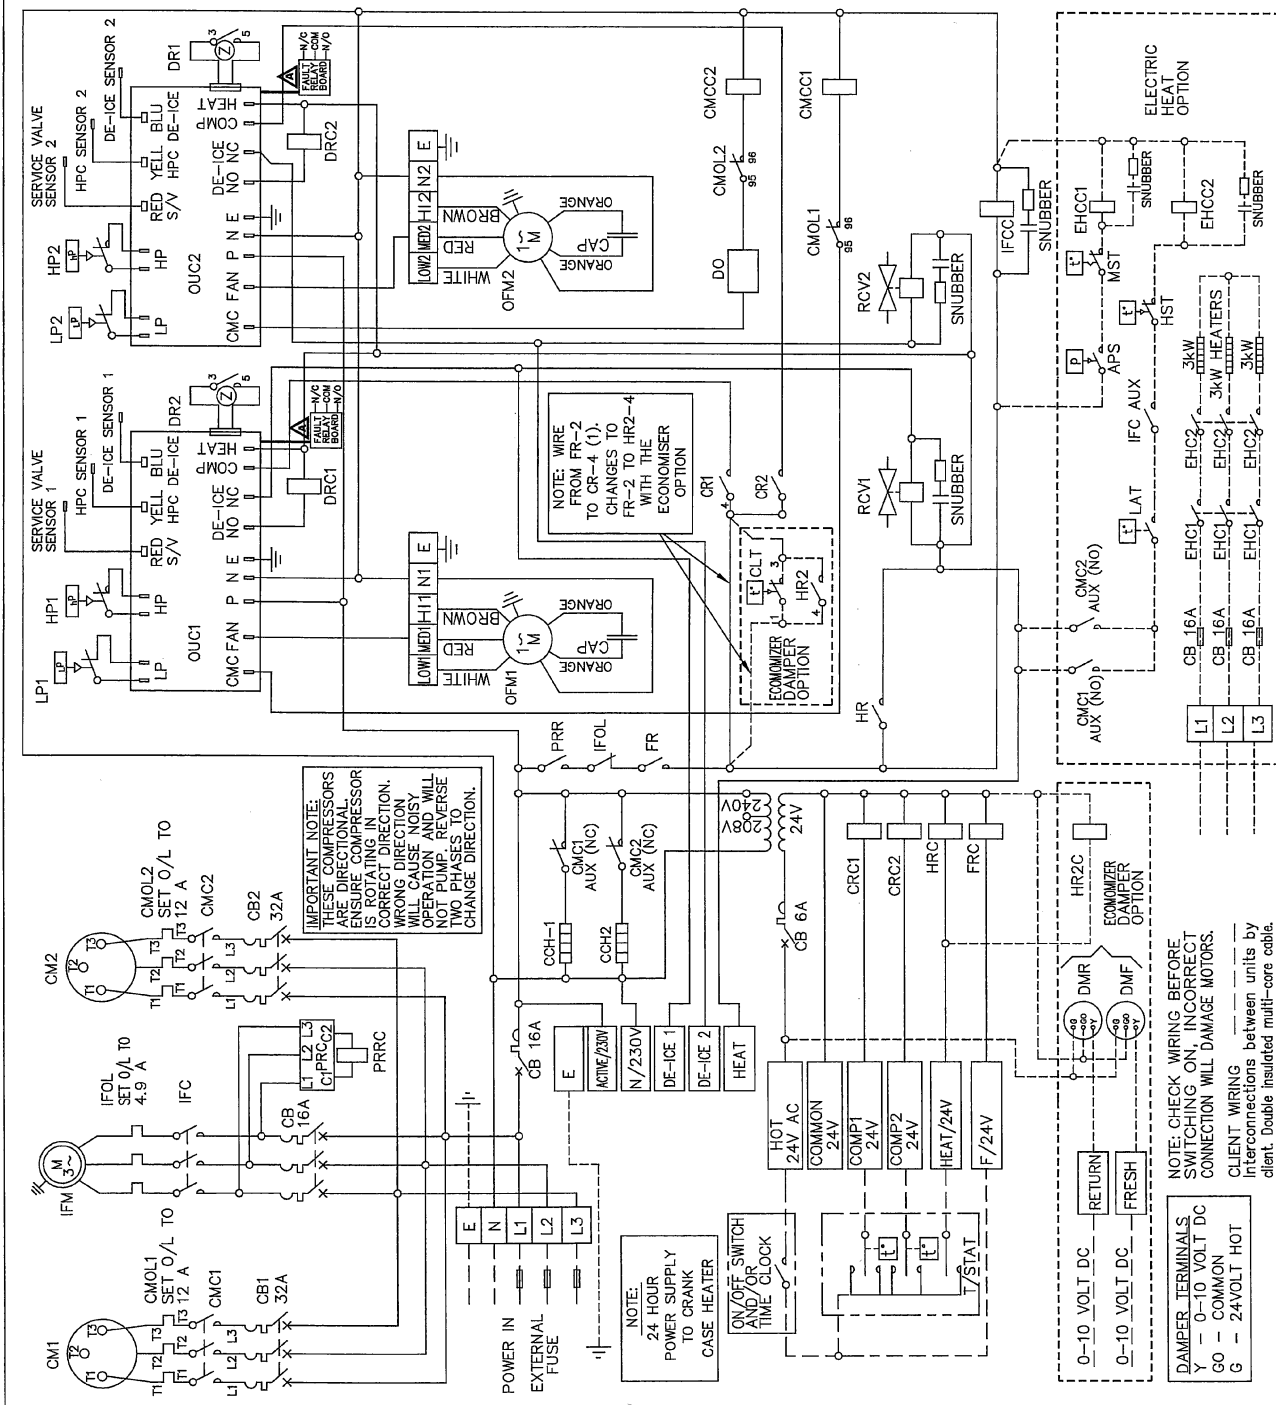

A	FAULT RELAY BOARD ADDED	16/6/06	06-09-07	ROD
ISSUE	MODIFICATION	ECN	DATE	APRVD

PLOTTED 06-09-07
©temperzone ltd 2005