


ENERGY
EFFICIENT



ISD 125Q / OSA 125

Technical Data

**Ducted
Split System Air Conditioner**

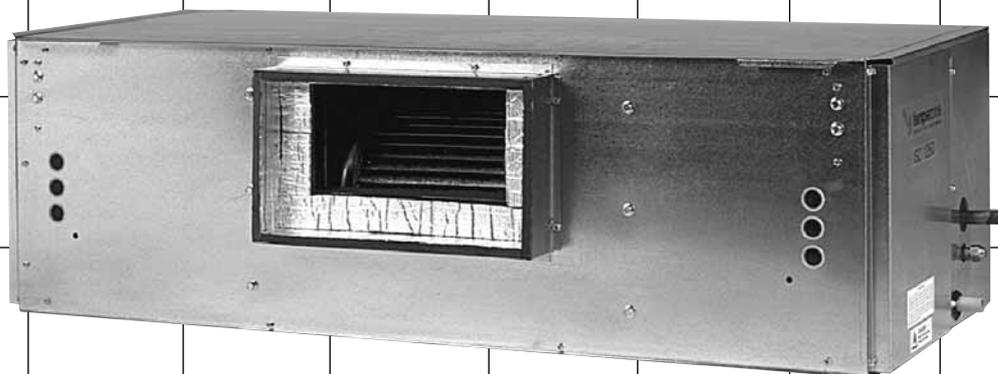

**Nominal Cooling Capacity
12.5 kW**

ISD 125Q / OSA 125 DUCTED SPLIT SYSTEM AIR CONDITIONER

GENERAL

- ISD 125Q** - Indoor unit usable for reverse cycle or cooling only
OSA 125 - A general designation for outdoor unit
OSA 125C - Outdoor unit, cooling only version
OSA 125R - Outdoor unit, reverse cycle version

The ISD indoor unit, together with its associated OSA outdoor unit, provides a three phase split system air conditioner designed and developed to comply with and exceed A.R.E.M.A. UEPS(7/84) specified conditions (i.e. guaranteed cooling cycle performance at 46°C outdoor temperature).

APPLICATIONS

These units have been specifically developed for air conditioning of light commercial and residential premises, e.g. offices, motels, shops and homes.

FEATURES

- Efficient.** The outdoor unit incorporates a high efficiency scroll compressor. Heat exchange coils incorporate inner grooved (rifled) tube for better heat transfer.
- Performance.** A dynamically balanced forward curved fan with a multi-speed motor enables fine tuning of the indoor unit to match the supply air requirements.
- Quiet.** The compressor is isolated in a built-in, insulated compartment to minimise noise. The indoor unit is also insulated for noise attenuation.

Slimline. The compact up-right design of the outdoor unit requires only a 150 mm gap on the coil side where installation is against a wall. Its slimline cabinet is particularly practical where there is restricted space, e.g. side access pathways, balconies, narrow ledges, etc. The unit is free standing, but can be fitted on a wall using the optional wall mounting brackets.

Durable. The outdoor unit's cabinet is constructed from high grade galvanised steel - polyester powder coated for all weather protection. External fasteners are stainless steel. The indoor unit's cabinet is constructed from high grade galvanised steel and includes a polyester powder coated drain tray.
 Heat exchange coils comprise aluminium corrugated plate fins on mechanically expanded rifled copper tube.

Service Access. The indoor unit's built-in drain tray can be removed for ease of cleaning and service accessibility.

Insulated. Closed cell foam insulation has been used in the indoor unit's cabinet to ensure no particles are introduced into the air stream.

Mounting. The indoor unit can be mounted rigid, or using the optional spring mounting brackets which minimise transfer of vibration.

STANDARD EQUIPMENT

- ISD Indoor Unit:
1. Coil
 2. Fan - forward curved centrifugal
 3. Fan motor - multi-speed
 4. Accurator expansion device
 5. Drain tray - powder coated, removable
 6. Spigots - supply and return

- OSA Outdoor Unit:
1. Compressor
 2. Coil
 3. Fan motor - multi-speed
 4. Propeller fan - direct drive
 5. Fan guard
 6. High/low pressure switch
 7. Circuit breaker control

- OSA 125R version also includes:
8. Reversing valve
 9. Accurator expansion device
 10. Time/temperature electronic de-ice control

OPTIONAL EQUIPMENT

- Outdoor Unit:
1. **temperzone** HP Fan Speed Controller (4 amp) - recommended where cooling is required in below 20°C ambient conditions for long periods of time.
 2. Epoxy Coated Coils - for protection in corrosive environments.
 3. Wall mounting brackets.
- Indoor Unit:
1. Filter box - integrated return air spigot and washable filter (rated EU2).
 2. Spring Mounting Kit.
 3. 3 kW electric booster heater box - complete with heater safety cutout thermostat and air flow switch.

SAFETY FEATURES

1. HP switch (auto reset), LP switch (auto reset) and an anti rapid cycle timer for compressor protection. The compressor also has internal overload protection.
2. Circuit breaker control circuits.
3. Time-and-temperature controlled electronic de-ice switch prevents icing up of the outdoor coil during heating cycle (OSA 125R only).

COMPRESSOR

Each high efficiency scroll type compressor is hermetically sealed, quiet running and supported on rubber mounts to minimise vibration.

REFRIGERATION PIPING

The standard unit allows for a line length of up to 35 m.

Max. height separations between units are :
 Reverse Cycle systems:

- Outdoor unit above indoor unit : 12 m
- Outdoor unit below indoor unit : 12 m.

Cooling Only systems:

- Outdoor unit above indoor unit : 18 m
- Outdoor unit below indoor unit : 12 m.

For extended line lengths contact your nearest **temperzone** sales office for additional details on piping requirements.

The OSA 125 is shipped from the factory with a charge of HCFC-22 (R22) refrigerant sufficient for a 10 m line length. Liquid and suction service valves are provided. The matched indoor unit is shipped with a holding charge of nitrogen. Both units have one flare and one brazed pipe connection.


WIRING

The electrical supply required (including voltage fluctuation limits) is:
 3 phase 342-436 V a.c. 50 Hz with neutral and earth. A control panel, located in the outdoor unit, is fully wired ready to accept the main power supply.

The manufacturer operates a quality management system that conforms to international standard ISO 9002.

AIR HANDLING

Note: In a free blow application, beware of exceeding indoor fan motor's full load amp limit.

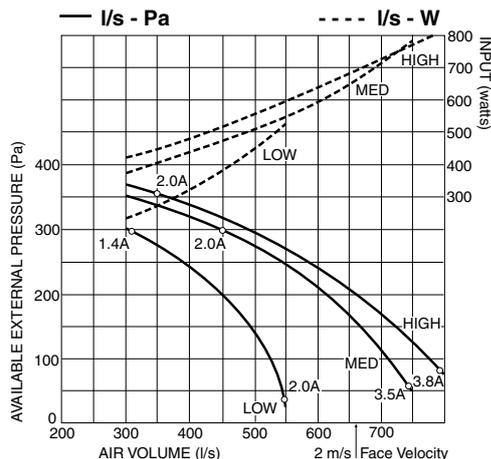

ELECTRICAL

E.E.R. / C.O.P. (cooling)	10 / 2.9
Indoor Fan Full Load Amps	5.7 A
Running Amps (Total System)	9.4 / 6 / 6
Recommended External Fuse	25 A

NOTE

Materials and specifications are subject to change without notice due to the manufacturer's ongoing research and development programme.

PERFORMANCE DATA

COOLING CAPACITY (kW)

Total = Total Capacity (kW) Sens. = Sensible Capacity (kW)
 E.A.T. = Entering Air Temperature ○ = Nominal Capacity (kW)

Note: Capacities are **gross** and do not include allowance for fan motor heat loss. Capacities are for close coupled systems. Interconnecting pipework will reduce capacity.

MODELS Indoor / Outdoor Unit	INDOOR FAN		INDOOR COIL E.A.T.		OUTDOOR COIL ENTERING AIR TEMPERATURE °C D.B.											
	SPEED	AIR l/s	W.B. °C	D.B. °C	23		27		31		35		39		43	
					Total	Sens.	Total	Sens.	Total	Sens.	Total	Sens.	Total	Sens.	Total	Sens.
ISD 125Q / OSA 125	HIGH	750	17	23	13.0	9.3	12.6	9.1	12.2	9.0	11.8	8.8	11.4	8.6	11.0	8.5
			19	27	13.7	10.7	13.3	10.5	12.9	10.4	12.5	10.2	12.1	10.0	11.7	9.9
			21	31	14.5	12.0	14.1	11.9	13.7	11.7	13.2	11.6	12.8	11.4	12.4	11.3

Indoor Air Flow Correction Factors @ nominal conditions

	-20%	Indoor Air Flow (%)		
		-10%	Rated	+10%
Total Capacity	0.95	0.975	1.0	1.025
Sensible Capacity	0.89	0.950	1.0	1.050

NOTE: An optional Outdoor Unit fan speed controller is available and is recommended where cooling is required in below 20°C ambient conditions for long periods of time.

PIPE LENGTH CAPACITY LOSS ON COOLING CYCLE DUE TO PRESSURE DROP

Note: Loss percentage is approximate only. No allowance made for vertical piping.

Pipe Size (mm)		Equivalent Line Pipe Length (m)					Additional Pipe Length to allow per Bend		
Liquid	Suction	5	10	15	20	30	Suction Pipe Size OD	19 mm	22 mm
10	19	1.6 %	3.2 %	4.7 %	-	-	Large 90° Radius	0.43 m	0.46 m
10	22	0.8 %	1.6 %	2.4 %	3.2 %	4.7 %	Standard 90° Elbow	0.61 m	0.70 m

HEATING CAPACITY (kW)

G = Gross Heating Capacity kW, based on nominal air flow of 750 l/s.
 N = Net Heating Capacity kW allowing for average defrost.

○ = Nominal Capacity (kW)

Reverse Cycle Systems

MODELS Indoor / Outdoor Unit	INDOOR ENTERING AIR TEMP. °C D.B.	OUTDOOR COIL ENTERING AIR TEMPERATURE (E.A.T.) °C D.B.															
		-4		-2		0		2		4		6		8		10	
		G	N	G	N	G	N	G	N	G	N	G	N	G	N	G	N
ISD 125Q / OSA 125R	15	8.6	7.7	9.2	8.3	9.8	8.8	10.5	9.0	11.1	9.4	11.9	10.8	12.6	12.6	13.0	13.0
	20	8.4	7.6	9.0	8.1	9.6	8.5	10.2	8.8	10.8	9.2	11.6	10.5	12.2	12.2	12.7	12.7
	25	8.1	7.3	8.7	7.8	9.3	8.3	9.9	8.5	10.4	8.9	11.2	10.2	11.9	11.9	12.3	12.3

SOUND LEVELS

Sound Power Levels (SWL)

Test Conditions: BS 848 PT2 1985. Installation Type A (free inlet and outlet). Direct method of measurement (reverberant room). Measured in decibels re 1 picowatt.

Indoor Unit - Supply Air Outlet

FAN SPEED	AIR FLOW l/s	STATIC PRESSURE Pa	SWL dB(A)	OCTAVE BAND FREQUENCY Hz					
				125	250	500	1 k	2 k	4 k
				SOUND POWER LEVELS (SWL) dB					
LOW	535	57	68	62	64	66	62	59	58
MED	715	85	75	68	71	71	71	67	66
HIGH	785	100	77	70	74	73	74	69	68

Outdoor Unit

MODEL	FAN SPEED	SWL dB(A)	OCTAVE BAND FREQ. Hz						SPL @ 3 m dB(A)	OCTAVE BAND FREQ. Hz					
			125	250	500	1 k	2 k	4 k		125	250	500	1 k	2 k	4 k
			SOUND POWER LEVELS dB							SOUND PRESSURE LEVELS dB					
OSA 125	MED	67	71	69	65	62	56	48	51	55	53	49	46	40	52
	HIGH	69	70	70	66	65	58	50	53	54	54	50	49	42	54



Sound Pressure Level (SPL) in decibels re 20 µPa.

DIMENSIONS (mm)

Not to Scale


ISD 125Q Indoor Unit

Net Weight 59 kg
Shipping Weight 61 kg

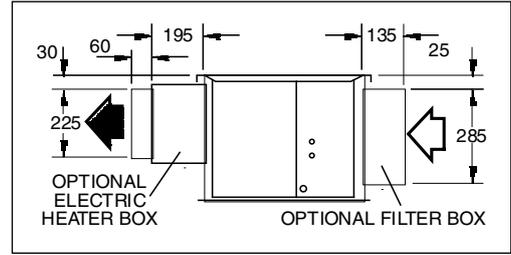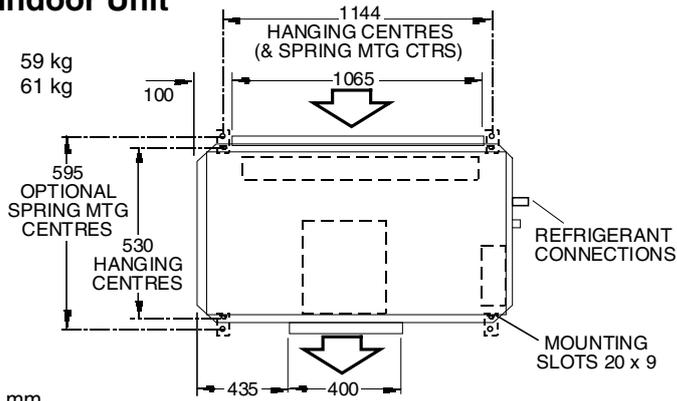

FAN ACCESS VIA REMOVEABLE BASE & DRAIN TRAY


Note : Allow 500 mm minimum clearance to each access panel.

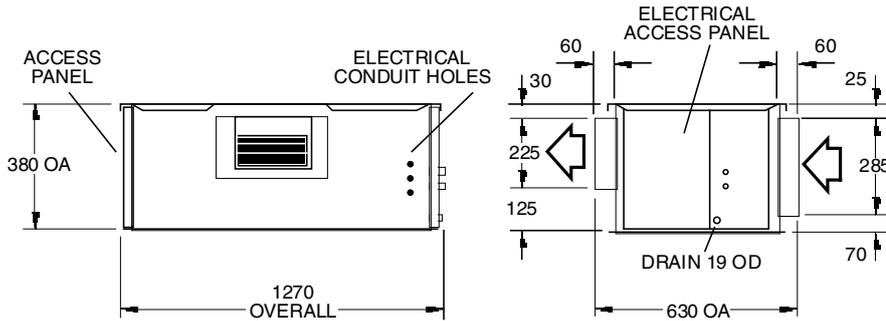

OSA 125 Outdoor Unit



	OSA 125C	OSA 125R
Net Weight	104 kg	108 kg
Shipping Weight	115 kg	119 kg

Note
Materials and specifications are subject to change without notice due to the manufacturer's ongoing research and development programme.

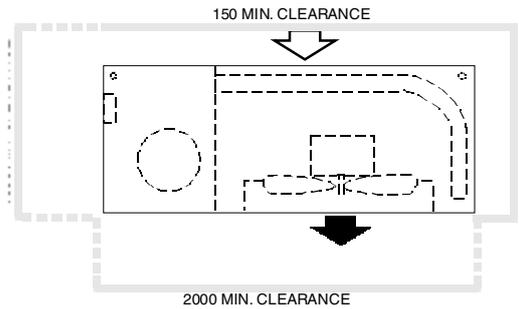

Recommended Pipe Sizes

Suction: 19 mm OD
Liquid: 10 mm OD

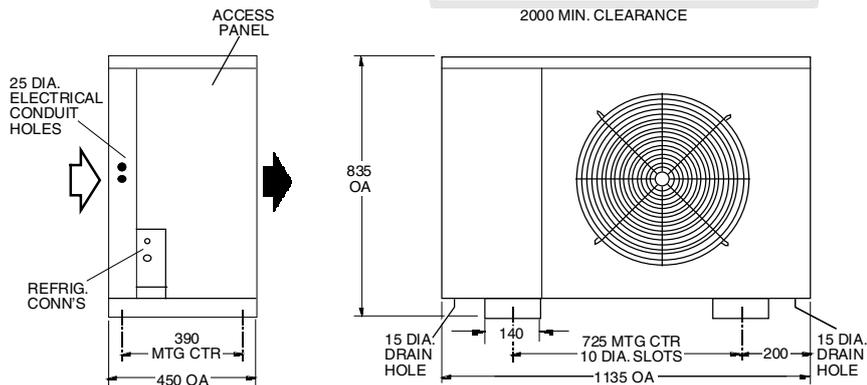

**ISO 9002
CERTIFIED**

BRADWAY ENGINEERING PTY LIMITED

Head Office, Sydney : 10 Garling Rd, Marayong, NSW 2148
PO Box 6448 DC, Blacktown, NSW 2148, AUSTRALIA

Sole Australian Supplier of **temperzone** Air Conditioners

Available from



BRADWAY
QUALITY AIR CONDITIONING

SYDNEY

Ph. (02) 9671-5055
Fax (02) 9622-3154

MELBOURNE

Ph. (03) 9551-7422
Fax (03) 9551-8550

PERTH

Ph. (08) 9336-3985
Fax (08) 9336-3461

BRISBANE

Ph. (07) 3262-1900
Fax (07) 3262-6446

ADELAIDE

Ph. (08) 8333-1833
Fax (08) 8333-1834

NEWCASTLE

Ph. (02) 4962-1155
Fax (02) 4961-5101

TOWNSVILLE

Ph. (07) 4788-8566
Fax (07) 4788-8573

HOBART

Ph. (03) 6272-0066
Fax (03) 6272-0506