

OPA 210-410

Plinth Kitset


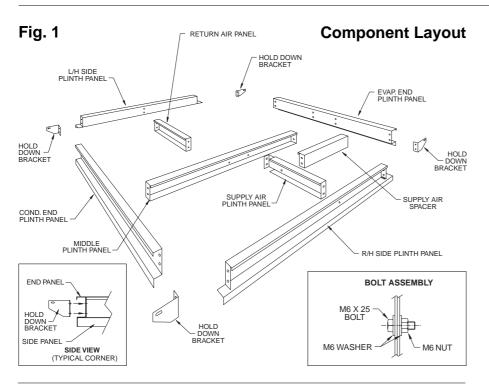


Fig. 2

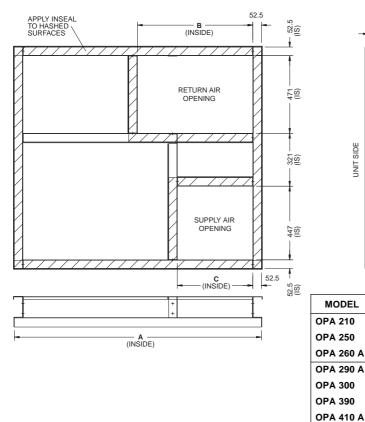

Aperture Dimensions (mm)

UNIT SIDE

MODEL

Α

1499

1499

1499

1599

1599

1599

1599

Assembly Instructions

GENERAL

This Plinth kitset is designed to fit the OPA 210-410 range of downward supply air packaged units.

COMPONENTS

Each Plinth Kitset consists of the following components :

- 1. Eight steel panels
- 2. Four hold down brackets
- 3. M6 stainless steel bolts 25 long (24)
- 4. M6 stainless steel flat washers (48)
- 5. M6 stainless steel nuts (24)
- 6. Roll of inseal.

Check that all of the above items have been supplied and that no damage has occurred in transit.

A silicon sealant (not supplied) is required to complete the Plinth Kit assembly.

ASSEMBLY

Fasten the steel panels together using the fasteners supplied and as per figure 1.

Apply inseal to the top surfaces indicated in figure 2.

Seal all joints with silicon sealant.

MOUNTING

Construction of the kerb mount for the plinth will vary depending on the site requirements. Refer to diagrams overleaf for a general indication of what is required.

UNIT INSTALLATION

Secure the OPA unit to the plinth by bolting the OPA's mounting frame to each corner of the plinth using the holes provided in the hold down brackets.

NOTE

The manufacturer reserves the right to change specifications at any time without notice or obligation.

This pamphlet replaces the previous issue no. 1659 dated 03/99. OPA 240 now 260; OPA 380 now 410.

185

RETURN 1

AIR FLOW

SUPPLY

AIR FLOW

С

458

458

458

558

558

558

558

ROOF/UPSTAND SIDE

(IS)

1344

в

700

700

700

800

800

800

800

