


## Ducted Packaged Roof Top Air Conditioners

## Product Review OPA-RK Series

**R410A**

Extra Long Life  
Epoxy Coated Outdoor Coil

Nominal Cooling Capacity  
**10.6 kW – 137 kW**

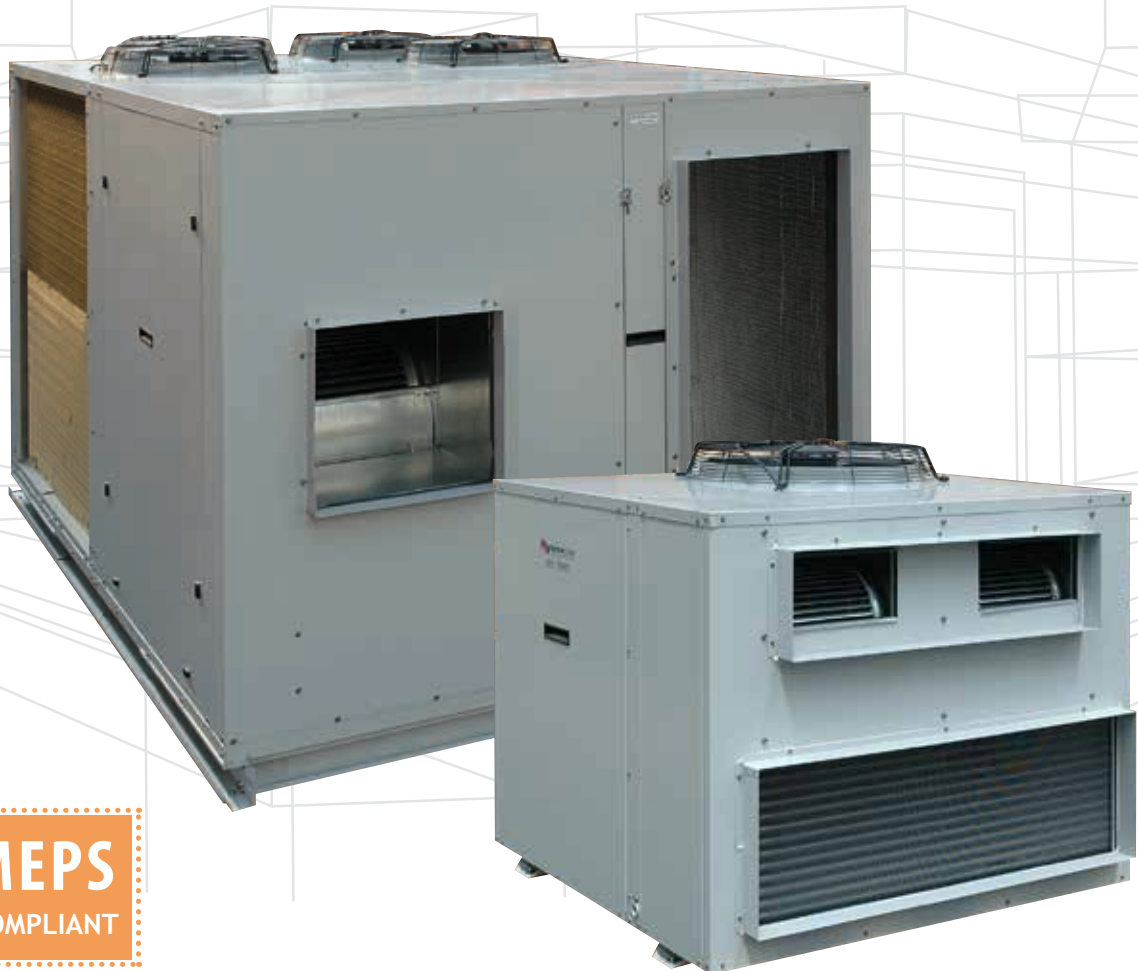

**MEPS**  
COMPLIANT

**INVERTER**  
MODEL

**diGital**  
MODELS

## OPA-RK SERIES - DUCTED PACKAGED ROOF TOP AIR CONDITIONERS

### GENERAL

The OPA Series Roof Top air conditioners have been conceived from the start as reverse cycle (heat pump) packaged systems – designed to be efficient both when heating and cooling.

### TEMPERZONE LIMITED

**temperzone** is one of Australasia's largest manufacturers of reverse cycle packaged air conditioners. The company has been supplying units to the commercial and industrial markets for over 35 years. Manufacturing facilities are located in New Zealand and Australia.

**temperzone's** mission is to provide the most competitively priced, reliable and efficient air conditioning equipment available to the international market.

### APPLICATIONS

Ducted packaged systems are unobtrusive, quiet, and designed to provide year round comfort – warming in Winter and cooling in Summer. **temperzone's** wide product range offers a unit of performance capacity to suit small to large packaged air conditioner applications, e.g. offices, shops, motels, fast food outlets, restaurants, petrol stations, open plan office and work spaces, supermarkets, shopping malls and auditoriums.

**temperzone** ducted systems are particularly suitable for rooms with suspended tile ceilings. Not only is valuable wall space preserved, but also the conditioned air can be ducted to the parts of the room where it is most needed.

OPA units are suited to high static pressure applications where large volume spaces are to be air conditioned. Long pipe and duct runs are possible enabling greater installation flexibility.

This range of units have been developed to meet the needs of typical applications. Should you have special requirements, such as higher air flows or greater sensible duty units contact your nearest **temperzone** representative. **temperzone** engineers have extensive experience in designing air conditioning equipment for specific applications.

### FEATURES

**Refrigerant R410A.** Each system uses refrigerant R410A which is deemed to have zero ozone depletion potential.

**Economy.** Larger models (refer table) feature the flexibility and economy of two or more stage operation. Compressors are progressively switched on only as they are needed. This has the added advantage of lowering start-up current.

**Variable Capacity Compressors.** 'Digital' or 'inverter' systems include a digital or inverter scroll compressor, plus a conventional scroll compressor on twin systems. Each digital model/version provides a variable capacity ability that enables closer control of room temperature. With 'Digitals' this is achieved by avoiding on/off cycling of the compressor. These compressors have proven very reliable because of their design simplicity. Electrical harmonic noise is very low. 'Inverter' variable capacity is achieved by changing the speed of the compressor. Higher part load efficiency is achieved with this type of compressor, i.e. less power usage.

**Efficient.** These reverse cycle (heat pump) air conditioners provide one of the most efficient forms of heating you can invest in. For every 1 kW of power consumed, up to 3 kW of heat is generated. Each outdoor unit incorporates high efficiency scroll or rotary compressor/s. Heat exchange coils use inner grooved (rifled) tube for better heat transfer. High efficiency EC motors are used in some models.

**Performance.** These systems have been designed and tested to perform in ambient conditions as low as -5°C and as high as 50°C. Models with EC motors can be controlled

by either a 0-10V DC signal or High/Med/Low fan speed. EC Plug fan models have high static performance. The larger indoor units have belt driven fans for even finer tuning.

**Durable.** **temperzone** packaged systems are built tough to withstand all weathers. Their durable construction ensures a long life and excellent return on your investment.

The outdoor air coils' aluminium fins are epoxy coated for extra protection in corrosive environments, e.g. salt laden sea air. Cabinets are constructed from high grade galvanised steel - polyester powder coated (grey) for all weather protection. External fasteners are stainless steel. Corrosion resistant drain trays are also included. Fan motor bearings are sealed for life so as not to incur regular maintenance.

**Insulation.** Indoor air sections are generously insulated to reduce condensation and contain noise.

**Self Diagnostics.** Unit's include a controller (OUC) that has a display of LEDs to indicate faults and running conditions. A general fault indicator is included for interface to external systems.

**Safety.** The refrigeration systems includes a number of protection facilities, including: HP and loss of refrigerant indication, anti rapid cycle timers, frost protection, circuit breaker control circuits, electronic de-ice switch, crankcase heaters and 24 V control.

**Configurations.** Two versions are available for models OPA 242RK – OPA 1370RK :

1. Horizontal supply/return air with box mounting channel, or
2. Downward supply air with box mounting channel.

Models OPA 116RK–186RK are all horizontal configuration.

OPA 116RKY – OPA 186RKY use EC motor indoor air fans, OPA 242 and 280 have EC plug fans, while OPA 280RK – OPA 1370RK use belt drive fans with adjustable pulleys to match the supply air/ static pressure requirements.

**Economiser Option.** If the outdoor air temperature or enthalpy is below that of the return air, the compressor stops, a fresh air damper opens and the return air damper closes. Operating costs are reduced as free cooling is obtained. Fresh air dampers close to a minimum setting and return air dampers open before normal compressor operation resumes.

**Fresh Air Introduction.** An optional fresh air damper is available for most models (refer table). For applications using high proportions of fresh air (50%+) a limiting thermostat will be custom fitted to stop the compressor/s when the air-on coil temperature is too low (18°C minimum).

**User Friendly.** Two room temperature controllers are available - refer options below. Both controllers have been designed to maintain a high level of comfort for room occupants. Emphasis has been placed on providing controls that are easy to use – despite the sophisticated microprocessor system that runs it. Use of the Auto and Timer function settings allows you to "set it and forget it".

**Peace of Mind.** The manufacturer operates a quality management system that conforms to AS/NZS ISO 9001: 2008. **temperzone** products have been chosen, against worldwide competition, for use in some of the most exclusive projects – chosen because of their proven efficiency, durability, performance, reliability and value.

### OPTIONS

- Pleated filters, 50mm thick on OPA 242 - 960.
- SAT Controller Kits for non-digital models.
- TZT-100 Room Thermostat Controller for all models including UC6 or UC7 Controller (incl. digitals).
- Single digital compressor replacement for multiple compressor systems.


# new diGital models!

## SECRETS OF THE SCROLL

Introducing one of the first compressors to deliver a capacity range from 10% to 100% without the use of inverters.

Digital compressors ensure high efficiency through a unique feature termed axial compliance. This allows the fixed scroll to move incrementally in the axial direction to ensure that fixed and orbiting scrolls are always loaded together with optimal force.

With 70% fewer moving parts, digital compressors deliver enhanced performance with reliable and uncomplicated design.

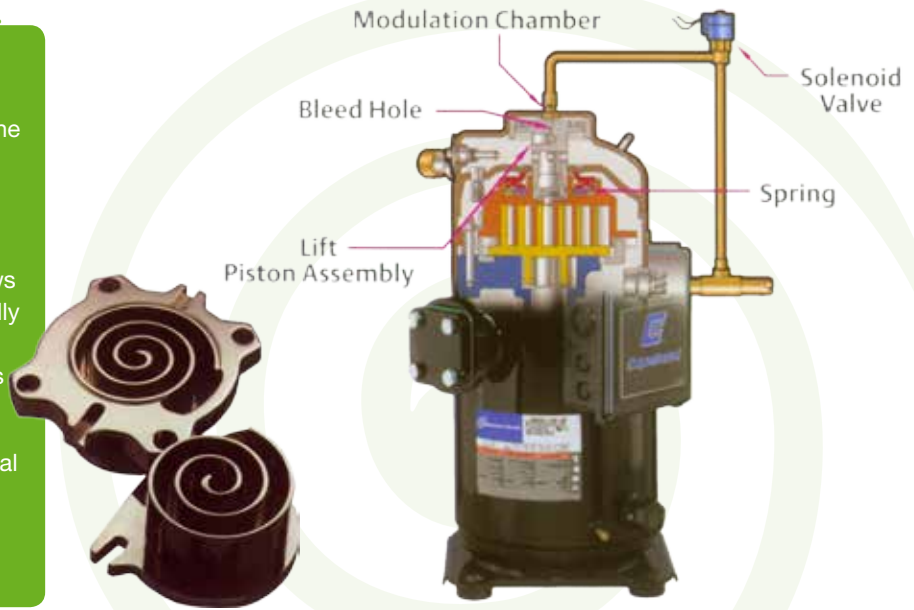

**Extended Capability.** Digitals are particularly suitable for applications requiring full or high proportions of fresh air, VAV, close control and supply air temperature control.

**Control Option.** The compressor is controlled variably by a 0–10 volt DC signal that can be supplied either by a BMS system, a sophisticated controller or temperzone's optional TZT-100 Controller.



## DIGITAL MODELS

Model		OPA 186G	OPA 201G
Nominal Cooling Capacity *1	kW	18.6	20.0
Net Cooling Capacity	kW	18.2	19.7
EER / AEER (cooling)		3.17 / 3.15	3.14 / 3.32
Heating Capacity *2	kW	16.2	18.1
COP / ACOP (heating)		3.45 / 3.43	3.34 / 3.32
Supply Air Flow (nominal)	l/s	1000	1100
Sound Pressure Level (SPL) *3	dB(A)	59	59
Sound Power Level (SWL) *4	dB(A)	75	75
Power Supply *5		400 – 415 V a.c. 50 Hz	
Running Amps (Total System)	A	15 / 10 / 10	13 / 9 / 9
Max. Running Amps (Total System)	A/ph.	24	24
Dimensions :	Width	mm	1200
	Depth	mm	1160
	Height	mm	1070
Weight	kg	214	265
Features *7		a g v w	a g v w

### \*7 Key to Features:

a – 24 volt control

b – Twin compressor system (twin circuit) - enables staging and low start-up current

c – Fresh air damper option

g – Digital compressor (single)

u – Downward supply/return air c/w box mounting channel option

v – Belt drive indoor fan

w – Optional TZT-100 Controller

z – Economiser option

# DUCTED PACKAGED ROOF TOP SYSTEMS

## NON DIGITAL MODELS

### Specifications Overview



Model	OPA 116	OPA 161	OPA 186	OPA 201	OPA 242	OPA 280	OPA 294	OPA 296	OPA 340	
Nominal Cooling Capacity*1	kW	<b>11.6</b>	<b>16.1</b>	<b>18.6</b>	<b>20.0</b>	<b>24.2</b>	<b>27.1</b>	<b>29.5</b>	<b>34.0</b>	
Net Cooling Capacity	kW	11.30	15.60	18.16	18.8	22.34	26.6	28.3	32.1	
EER / AEER (cooling)		3.35 / 3.33	3.24 / 3.23	3.30 / 3.28	3.20 / 3.19	3.19 / 3.17	3.28 / 3.27	3.21 / 3.20	3.22 / 3.20	3.31 / 3.29
Heating Capacity *2	kW	<b>10.8</b>	<b>14.4</b>	<b>16.7</b>	<b>18.75</b>	<b>22.2</b>	<b>25.8</b>	<b>27.2</b>	<b>30.7</b>	
COP / ACOP (heating)		3.58 / 3.56	3.52 / 3.50	3.52 / 3.50	3.55 / 3.53	3.44 / 3.42	3.55 / 3.54	3.72 / 3.70	3.17 / 3.15	3.66 / 3.64
Supply Air Flow (nominal)	l/s	650	815	1000	1100	1400	1500	1600	1700	1800
Sound Pressure Level (SPL)*3	dB(A)	55	55	59	59	62	57	57	65	T.B.A
Sound Power Level (SWL)*4	dB(A)	71	71	75	75	78	81	73	81	T.B.A
Power Supply *5		400 – 415 V a.c. 50 Hz								
Running Amps (Total System)	A	9 / 5 / 5	11 / 7 / 7	12 / 8 / 8	13 / 9 / 8	13 / 10 / 10	16 / 16 / 16	18 / 15 / 15	14 / 16 / 13	17 / 20 / 17
Max. Running Amps (Total)	A/ph.	10	24	24	24	17	20	23	23	25
Dimensions :	Length	mm	1200	1200	1200	1200	1565	1780	1670	2058
	Depth	mm	1100	1160	1160	1230	1545	1505	1490	1625
	Height	mm	915	1070	1070	1175	1370	1520	1500	1500
Weight	kg	193	225	235	270	443	500	516	490	631
Features *7		ay	ay	ay	ay	abcuvz	abcpuvz	abcuvz	acpfuwz	abcuvz



Model	OPA 370	OPA 465	OPA 550	OPA 700	OPA 800	OPA 850	OPA 960	OPA 1370		
Nominal Cooling Capacity*1	kW	<b>39.1</b>	<b>46.7</b>	<b>56.1</b>	<b>69.6</b>	<b>78.7</b>	<b>85.1</b>	<b>137.0</b>		
Net Cooling Capacity	kW	36.9	44.6	53.9	66.8	74.2	80.09	127.7		
EER / AEER (cooling)		3.23 / 3.22	2.96 / 2.95	3.05 / 3.04	3.17 / 3.16	2.99 / 2.98	3.04 / 3.03	2.80 / 2.79	2.90 / 2.89	
Heating Capacity*2	kW	<b>35.6</b>	<b>43.5</b>	<b>49.5</b>	<b>67.4</b>	<b>70.7</b>	<b>83.5</b>	<b>130.0</b>		
COP / ACOP (heating)		3.49 / 3.47	3.47 / 3.45	3.30 / 3.29	3.58 / 3.56	3.18 / 3.16	3.30 / 3.28	3.40 / 3.38	4.02 / 4.00	
Supply Air Flow (nominal)	l/s	2100	2500	2800	3700	4250	4200	5200	7500	
Sound Pressure Level (SPL)*3	dB(A)	65	62	68	64	66	66	67	70	
Sound Power Level (SWL)*4	dB(A)	81	78	84	82	82	84	85	86	
Power Supply *5		400 – 415 V a.c. 50 Hz								
Running Amps (Total System)	A	24 / 20 / 20	32 / 27 / 27	39 / 30 / 29	43 / 36 / 37	50 / 40 / 40	47.5 / ph.	55 / ph.	82 / 87 / 87	
Recommended Ext. Protection	A/ph.	50	50	80	100	120	100	120	125	
Dimensions :	Length	mm	1970	2225	2225	2990	2990	2790	2790	4668
	Depth	mm	1685	1950	1950	2240	2240	2150	2150	2425
	Height	mm	1555	1635	1750	1905	1905	1860	1860	2330
Weight	kg	662	800	851	1234	1234	1162	1233	2297	
Features *7		abcuvz	abcuvz	abcuvz	abcuvwz	abcuvwz	abcuvz	abcuvz	abcuvwz	

### \*7 Key to Features:

- a – 24 volt control
- b – Twin compressor system (twin circuit) enables staging and low start-up current
- c – Fresh air damper option
- e – Electric Heat Kit option
- p – Plug fan c/w EC motor

- f – Inverter compressor (single)
- u – Downward supply/return air c/w box mounting channel option
- v – Belt drive indoor fan
- w – Optional TZT-100 Controller
- y – EC Motor
- z – Economiser option

## Notes

Filters are optional. Refer to separate Technical Data pamphlets for performance data under a range of conditions.

\*1 Nominal Cooling Capacity at AS/NZS 3823 conditions: Indoor Entering Air Temperature 27°C D.B., 19°C W.B.;  
Outdoor Entering Air Temperature 35°C D.B.

Net Cooling Capacity figures at AS/NZS 3823 include an allowance for fan motor heat loss.

\*2 Nominal Heating Capacity at AS/NZS 3823 conditions: Indoor Entering Air Temperature 21°C D.B.;  
Outdoor Entering Air Temperature 7°C D.B., 6°C W.B.

\*3 Radiated SPL at 3 m and at nominal air flow.

\*4 Supply air outlet at nominal air flow.


\*5 Voltage fluctuation limits: 342 – 436 V.

\*6 OPA 100 not available in Australia.

### \*6 Key to Features:

- a – 24 volt control
- b – Twin compressor system (twin circuit) - enables staging and low start-up current
- c – Fresh air damper option
- g – Digital compressor (single)
- f – Inverter compressor (single)
- p – Plug fan c/w EC motor
- u – Downward supply/return air c/w box mounting channel option
- v – Belt drive indoor fan
- w – Optional TZT-100 Controller
- y – EC indoor air fan motor
- z – Economiser option

## NOMENCLATURE

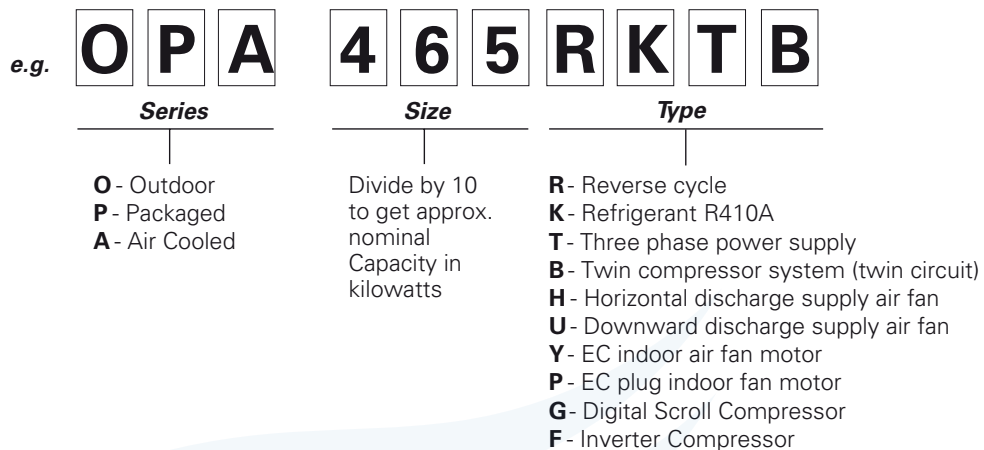

**Optional SAT Wall Thermostat**  
for non-digital systems

Materials and specifications subject to change without notice due to the manufacturer's ongoing research and development programme.





visit our website [www.temperzone.biz](http://www.temperzone.biz)

#### AUCKLAND

temperzone Ltd  
38 Tidal Road, Mangere South,  
Manukau 2022.  
Private Bag 93303, Otahuhu,  
Manukau 1640, N.Z.  
Phone 0-9-279 5250  
Fax 0-9-275 5637  
Email [sales@temperzone.co.nz](mailto:sales@temperzone.co.nz)

#### WELLINGTON

Phone 0-4-569 3262  
Fax 0-4-566 6249

#### CHRISTCHURCH

Phone 0-3-379 3216  
Fax 0-3-379 5956

#### SYDNEY

temperzone australia Pty Ltd  
14 Carnegie Place, Blacktown  
NSW 2148  
PO Box 8064, Seven Hills West  
NSW 2147  
Phone (02) 8822 - 5700  
Fax (02) 8822 - 5711  
Email [sales@temperzone.com.au](mailto:sales@temperzone.com.au)

#### MELBOURNE

Phone (03) 8769 - 7600  
Fax (03) 8769 - 7601

#### ADELAIDE

Phone (08) 8340 - 0607  
Fax (08) 8340 - 2118

#### PERTH

Phone (08) 9314 - 3844  
Fax (08) 9314 - 3855

#### TOWNSVILLE

Phone (07) 4773 - 9566  
Fax (07) 4773 - 9166

#### BRISBANE

Phone (07) 3308 - 8333  
Fax (07) 3308 - 8330

#### NEWCASTLE

Phone (02) 4962 - 1155  
Fax (02) 4961 - 5101

#### HOBART

Phone (03) 6272 - 0066  
Fax (03) 6272 - 0506

#### SINGAPORE

temperzone Ltd  
1 Claymore Drive, #08-13  
Rear Block, Orchard Towers  
Singapore 229594  
Phone SNG 6733 - 4292  
Fax SNG 6235 - 7180  
Email [sales@temperzone.com.sg](mailto:sales@temperzone.com.sg)

