


3.2.4. RAS-70YHA2, RAS-80YHA2

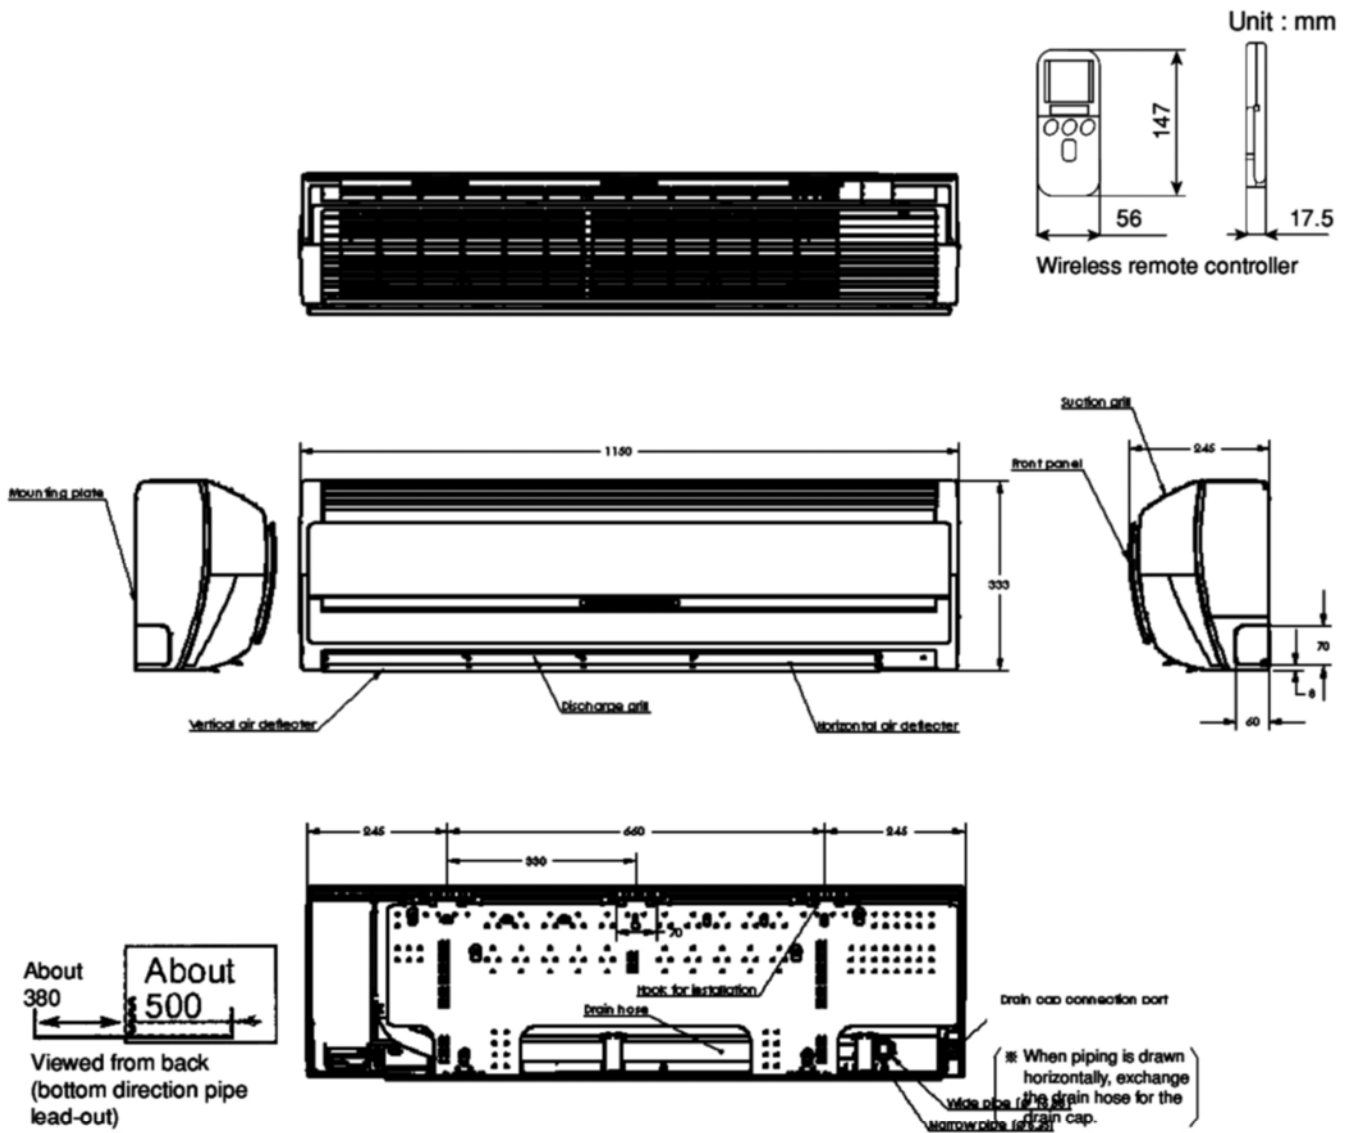

Notes:

1. Service space (free space needed for servicing) is 200mm on the right, 100mm on the left and 50mm on top.
2. The wide and narrow pipes must be thermally insulated.

3.2.9. RAC-70YHA2, RAC-80YHA2

