

Excellence through Innovation

Infrared Tube Heater

calorSchwank D Form LL



Now also with
modulating operation



Distributed by
 **temperzone**
climate innovations


Schwank
INNOVATIVE HEATING SOLUTIONS



Infrared Tube Heater – calorSchwank D Form LL

- Radiant factor of up to 70.2%* and therefore achieving excellent efficiency
- Available as single stage, 2-stage or fully modulating version
- With Isotherm insulation / minimisation of convection losses
- Long laminar flame
- Pressure burner system Whisper-Jet
- As quiet as a whisper
- Quality „Made in Germany“
- Quick and easy installation

* radiant factor of a calorSchwank 30 measured by DVGW laboratory according to DIN EN 416-2

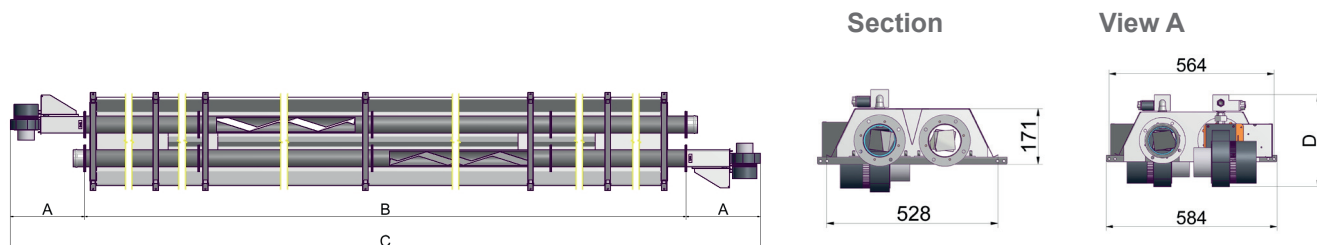

Dimensions [in mm]		80 LL	100 LL	120 LL
A		445	470	470
B		13620	18000	19490
Dimension B refers to: [numbers of tubes x length of tubes in mm]				
C		14510	18940	20430
D		291	308	308
Gas		80 LL	100 LL	120 LL
Natural gas H / G 20	gas input in kW	78,0	98,0	120,0
	[H _{i,n} = 9,97 kWh/m ³] gas consumption in m ³ /h	7,82	9,82	12,04
Natural gas L / G 25	gas input in kW	78,0	98,0	120,0
	[H _{i,n} = 8,57 kWh/m ³] gas consumption in m ³ /h	9,10	11,44	14,0
Propane / G 31	gas input in kW	78,0	98,0	120,0
	[H _{i,n} = 12,87 kWh/kg] gas consumption in kg/h	6,06	7,62	9,32
weight in kg		219	306	335
air/exhaust connection in mm		Ø 100		
electrical consumption in W		208	182	182
electrical protection		IP 20		
gas connection [female]		R ³ / ₄ "	R ³ / ₄ "	R ³ / ₄ "
electrical supply in V		230 V / 50 Hz ~		
ignition and control		spark ignition and ionisation electrode run by automatic controller		
CE-Identification		CE-0085BO0037		

Appliance

- as single heater with individual fan
- as system D [herringbone system], several heaters with central flue fan

Air/exhaust requirements

- for indoor dependent operation [Art. B]
- for indoor independent operation [Art. C]

Min. connection pressure

	80 LL - 100 LL	120 LL
Nat. gas H:	15 mbar	20 mbar
Nat. gas L:	20 mbar	30 mbar
Propane:	40 mbar	40 mbar

Max. connection pressure

Nat.gas and propane: 60 mbar



Hamilton
30 Gallagher Drive, Melville,
Hamilton 3026
Ph: 07 839 2705
E: tzhamilton@temperzone.com

Auckland
38 Tidal Rd, Mangere South,
Auckland 2022
Ph: 09 279 5250
E: nzsales@temperzone.com

Wellington
6th Union Street, Petone,
Lower Hutt 5012
Ph: 04 569 3262
E: wgtm@temperzone.com

Christchurch
40 Cass Street, Sydenham,
Christchurch 8023
Ph: 03 379 3216
E: chch@temperzone.com