

Model	OPA 450RLTFPQ-S4
Configuration	Horizontal Supply Air
Item No. (Standard / Opposite Hand)	876-045-701 / 876-045-710
Unit c/w Fresh Air Cowl (OPA 450RLTFPQ-C)	878-045-701 / 878-045-710
Configuration	Downward Supply Air
Item No. (Standard / Opposite Hand)	876-045-723 / 876-045-732
Unit c/w Fresh Air Cowl (OPA 450RLTFPQ-C)	878-045-723 / 878-045-732
Cooling capacity (net) *	43.3 kW
Cooling capacity range (gross)	18.2 ~ 52.4 kW
Heating capacity *	44.4 kW
Heating capacity range	16.5 ~ 54.5 kW
Electrical input - cooling	14.5 kW
Electrical input - heating	14.2 kW
EER / AEER (cooling)*	2.99 / 2.98
COP / ACOP (heating) *	3.14 / 3.13
Unit Controller	UC8
Refrigerant	R32
Refrigerant Charge	10.5 kg
Minimum floor area (@2.4m below ceiling diffuser)	58.6 m ²
Compressor oil type	POE-46 (NXG5020 or equivalent)
Compressor type	inverter scroll
Power supply **	3 ph. 400 V ac 50 Hz + N + E
Compressor (3ph.) run amps *	19.5 A/ph.
Compressor + VSD circuit breaker	50 A
Indoor fan motor size	EC plug 500 dia. 3.58kW
Nominal air flow *	2,200 l/s
Indoor fan motor (3ph.) - full load	5.5 A/ph.
Outdoor fan motor (3ph.) - full load	4.2 A/ph.
Outdoor fan type	EC axial
Outdoor fan max. static pressure @ 5500 l/s	125 Pa
Control circuit breaker (internal)	2 A
Auxiliary power outlet (1ph.) overload setting	10 A
Running amps (total system)*	24 / 22 / 24 A
Max. running amps (total system)	40 A/ph.
RCD type recommended	type B, 30mA, 3 pole
Net weight	643 kg
Shipping Weight	708 kg
Net Weight c/w Fresh Air Cowl option	652 kg

Accessories:

Filters - rated EU4/G4 disposable	019-400-004 500x500x50 (x4)
Filters - rated EU4/G4 washable	019-000-033 500x500x50 (x4)
Drain tundish (set of 2)	060-000-653

Optional Controls:

Climate Touch CTC-1 Room temp. controller	201-000-792
TZT-100 Room temperature controller	201-000-350


Refer to temperzone for other options.

* Tested in accordance with AS/NZS 3823

** Voltage range: 376-440V


20053

DIMENSIONS (mm)




Not to Scale

OPA 450RLTFP01(-C)-S4 Standard Hand, Horizontal Supply

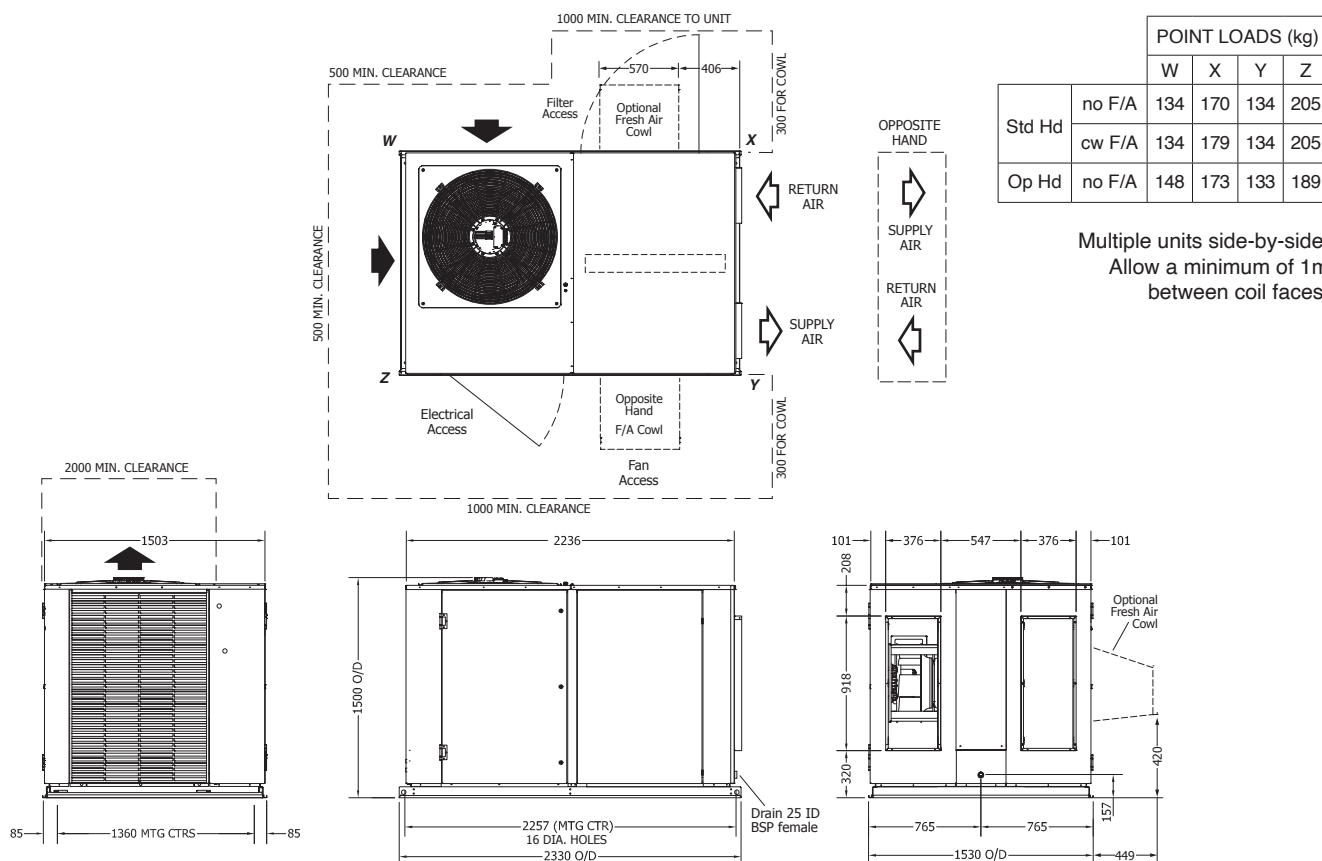

OPA 450RLTFP23(-C)-S4 Standard Hand, Downward Supply

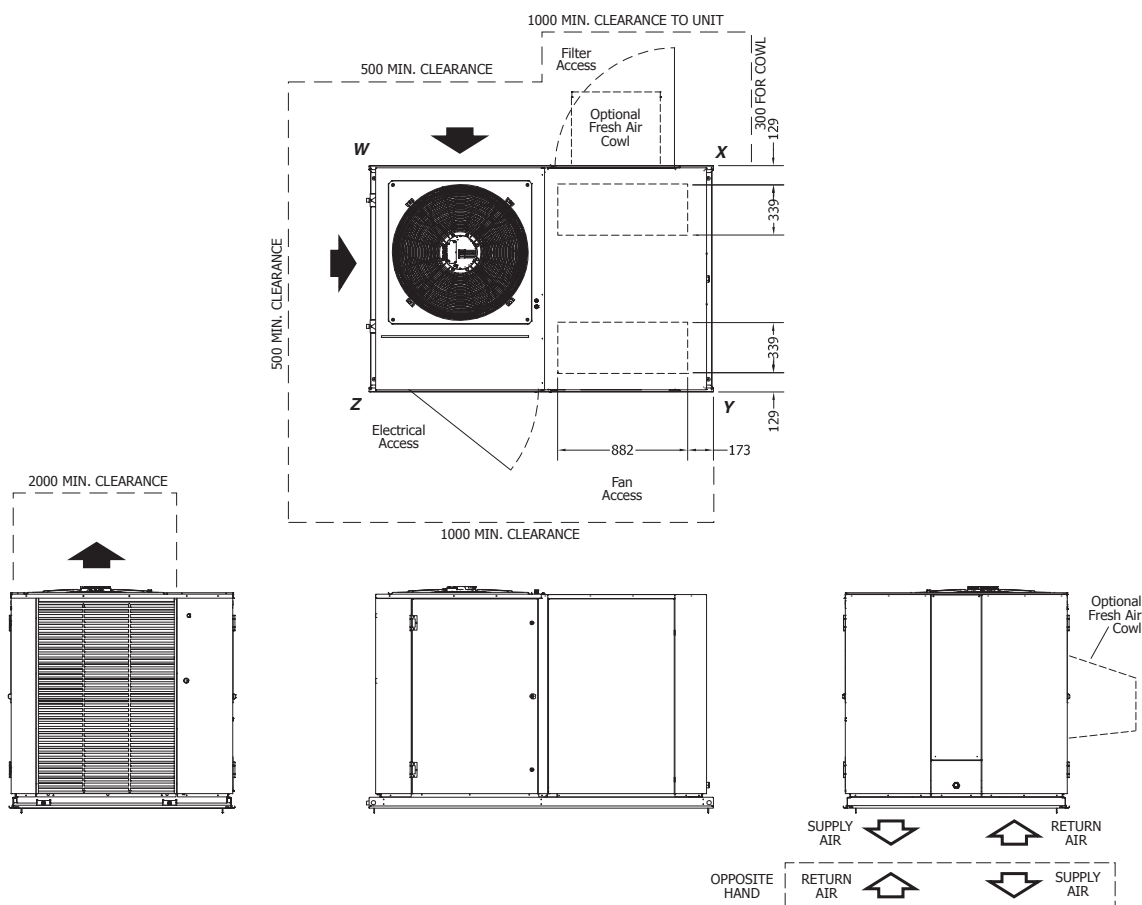

NOTE

Specifications are subject to change without notice due to the manufacturer's ongoing research and development programme.

	0	1	2	3	4	5	6	7	8	9																																																												
A	<div>Client Wiring</div> <div><div><div><div><div></div><div>TB1</div></div><div><div>TB2</div><div>N</div></div></div><div><div><div></div><div>TB1</div></div><div><div></div><div>TB2</div></div></div></div><div><div><div></div><div>L1</div></div><div><div>L2</div><div>L3</div></div></div><div><div><div></div><div>MIS</div></div></div></div> <div>Client External Protection and Isolator Switch</div>			<div>Customer BMS Input</div> <div><div><div><div></div><div>TB4</div></div><div><div>TB5</div><div>TB6</div></div></div><div><div><div></div><div>B1</div></div><div><div></div><div>A1</div></div></div><div><div><div></div><div>0V</div></div><div><div></div><div>12V</div></div></div><div><div><div></div><div>TB7</div></div><div><div></div><div>TB8</div></div></div></div> <div>Connect cable screen to 'EARTH' terminal</div>			<div>Ferrites</div> <table><thead><tr><th>Part Number</th><th>Frequency Type</th><th>Number of Turns</th></tr></thead><tbody><tr><td>A 012-001-074</td><td>High</td><td>1</td></tr><tr><td>B 012-001-094</td><td>Low</td><td>1</td></tr></tbody></table> <div>Important Note! Ferrite 'A' on OD Fan circuit breaker for OPA 450 and 560 only.</div>			Part Number	Frequency Type	Number of Turns	A 012-001-074	High	1	B 012-001-094	Low	1																																																				
Part Number	Frequency Type	Number of Turns																																																																				
A 012-001-074	High	1																																																																				
B 012-001-094	Low	1																																																																				
B	<div>Economiser Option</div> <div><div><div><div><div><div>TB26</div><div>TB27</div><div>TB28</div><div>TB29</div><div>TB30</div><div>TB31</div><div>TB32</div></div><div><div>0-10V</div><div>0-10V</div></div></div><div><div><div><div></div><div>24V TR</div><div>24V/CB</div><div>DMR</div><div>DMF</div></div><div><div>24V</div><div>0V</div><div>DMR</div><div>DMF</div><div>-</div></div></div><div><div><div><div></div><div>TB38</div></div><div><div>24V</div><div>0V</div><div>DMR</div><div>DMF</div></div></div><div><div><div></div><div>W13</div></div><div><div></div><div>RCLP7</div></div></div></div><div><div><div></div><div>DMR</div><div>DMF</div></div><div><div><div></div><div>G G O Y</div></div><div><div></div><div>G G O Y</div></div></div></div></div><div>Important Note! Unit requires 24 hour power supply for control circuit and crankcase heaters</div></div></div></div>																																																																					
C	<div>Sensors (S) / Transducers (T)</div> <table><thead><tr><th>Name</th><th>Type</th><th>Colour</th></tr></thead><tbody><tr><td>DL</td><td>Discharge Temp</td><td>S</td><td>GREY</td></tr><tr><td>SL</td><td>Suction Temp</td><td>S</td><td>WHITE</td></tr><tr><td>AMB</td><td>Ambient Temp</td><td>S</td><td>YELLOW</td></tr><tr><td>DEI</td><td>De-ice Temp</td><td>S</td><td>BLUE</td></tr><tr><td>IC</td><td>De-ice Temp</td><td>S</td><td>BLUE</td></tr><tr><td>LPT</td><td>Suction Pressure</td><td>T</td><td></td></tr><tr><td>HPT</td><td>High Pressure</td><td>T</td><td></td></tr></tbody></table> <div>SAT-3 & TZT100 connection to UC8 terminals</div> <table><thead><tr><th>UC8 terminals</th><th>SAT-3</th><th>TZT100 Terminals</th></tr></thead><tbody><tr><td>12</td><td>12V</td><td>24</td></tr><tr><td>B2</td><td>B</td><td>B</td></tr><tr><td>A2</td><td>A</td><td>A</td></tr><tr><td>0V</td><td>GND</td><td>24C</td></tr><tr><td>Shield to 0V</td><td></td><td></td></tr></tbody></table> <div>UC8 DIP switch settings</div> <table><thead><tr><th>DIP switch</th><th>↑ On/Off ↓</th></tr></thead><tbody><tr><td>1,2,4,6,7,10,14</td><td>On</td></tr><tr><td>All Others Off</td><td>Off</td></tr></tbody></table> <div>PSD DIP switch settings</div> <table><thead><tr><th>DIP switch</th><th>↑ On/Off ↓</th></tr></thead><tbody><tr><td>1, 4</td><td>On</td></tr><tr><td>2, 3</td><td>Off</td></tr></tbody></table>									Name	Type	Colour	DL	Discharge Temp	S	GREY	SL	Suction Temp	S	WHITE	AMB	Ambient Temp	S	YELLOW	DEI	De-ice Temp	S	BLUE	IC	De-ice Temp	S	BLUE	LPT	Suction Pressure	T		HPT	High Pressure	T		UC8 terminals	SAT-3	TZT100 Terminals	12	12V	24	B2	B	B	A2	A	A	0V	GND	24C	Shield to 0V			DIP switch	↑ On/Off ↓	1,2,4,6,7,10,14	On	All Others Off	Off	DIP switch	↑ On/Off ↓	1, 4	On	2, 3	Off
Name	Type	Colour																																																																				
DL	Discharge Temp	S	GREY																																																																			
SL	Suction Temp	S	WHITE																																																																			
AMB	Ambient Temp	S	YELLOW																																																																			
DEI	De-ice Temp	S	BLUE																																																																			
IC	De-ice Temp	S	BLUE																																																																			
LPT	Suction Pressure	T																																																																				
HPT	High Pressure	T																																																																				
UC8 terminals	SAT-3	TZT100 Terminals																																																																				
12	12V	24																																																																				
B2	B	B																																																																				
A2	A	A																																																																				
0V	GND	24C																																																																				
Shield to 0V																																																																						
DIP switch	↑ On/Off ↓																																																																					
1,2,4,6,7,10,14	On																																																																					
All Others Off	Off																																																																					
DIP switch	↑ On/Off ↓																																																																					
1, 4	On																																																																					
2, 3	Off																																																																					
D	<div>REV</div> <div>DESCRIPTION</div> <div>ECN</div> <div>DATE</div> <div>APPROVED</div> <table><tbody><tr><td>A</td><td>Initial Release</td><td></td><td></td><td></td></tr><tr><td>B</td><td>Economiser wiring modified for OPA003.</td><td>5033</td><td>22-07-22</td><td>A.W.G</td></tr><tr><td>C</td><td>Different IFM options shown</td><td>5047</td><td>16-09-22</td><td>R.K.</td></tr><tr><td>D</td><td>Updated & relocated PSD-2. Added Earth to Label plate & Removed OPA-250 title</td><td>5006/5172</td><td>21-01-25</td><td>V.N.</td></tr></tbody></table> <div>©temperzone Ltd 2025</div> <div><div></div>temperzone</div> <div>Client Wiring</div> <div>Drawn: A.W.G</div> <div>Date: 13-05-20</div> <div>Title: OPA 350/450/560 RLTFPQ(-Z) UC8 Wiring Schematic</div> <div>Drawing No: 291-003-263</div> <div>SHEET 2 OF 2</div> <div>Rev: D</div>			A	Initial Release				B	Economiser wiring modified for OPA003.	5033	22-07-22	A.W.G	C	Different IFM options shown	5047	16-09-22	R.K.	D	Updated & relocated PSD-2. Added Earth to Label plate & Removed OPA-250 title	5006/5172	21-01-25	V.N.																																															
A	Initial Release																																																																					
B	Economiser wiring modified for OPA003.	5033	22-07-22	A.W.G																																																																		
C	Different IFM options shown	5047	16-09-22	R.K.																																																																		
D	Updated & relocated PSD-2. Added Earth to Label plate & Removed OPA-250 title	5006/5172	21-01-25	V.N.																																																																		