

# IMDL 130-M

Nominal Airflow: 525 l/s

## Cooling Capacity (kW)

Entering Air Temperature 23° C D.B., 17° C W.B.

Total = Total Capacity (kW); Sens. = Sensible Capacity (kW)

Note: Cooling capacities are based on the nominal airflow.

COIL	WATER FLOW (l/s)	PRESSURE DROP (kPa)	ENTERING WATER TEMPERATURE °C									
			5		6		7		8		9	
			Total	Sens.	Total	Sens.	Total	Sens.	Total	Sens.	Total	Sens.
3 ROWS	0.20	8.5	8.0	6.3	7.4	6.0	6.8	5.8	6.2	5.6	5.6	5.3
	0.30	17.6	9.5	6.9	8.7	6.6	8.0	6.3	7.3	6.0	6.6	5.7
	0.40	29.5	10.5	7.3	9.7	7.0	8.9	6.7	8.1	6.3	7.4	6.0
4 ROWS	0.30	10.5	10.5	7.6	9.7	7.3	8.9	7.0	8.2	6.7	7.4	6.3
	0.40	17.6	11.6	8.1	10.8	7.7	10.0	7.4	9.0	7.0	8.1	6.6
	0.50	26.3	12.4	8.5	11.5	8.1	10.5	7.6	9.6	7.2	8.6	6.8


## Heating Capacity (kW)

Entering Air Temperature 21° C

Note: Heating capacities are total - based on the nominal airflow. Electric Heating option: 4 kW

COIL	WATER FLOW (l/s)	PRESSURE DROP (kPa)	ENTERING WATER TEMPERATURE °C								
			40	45	50	55	60	65	70	75	80
1 ROW	0.08	9.0	3.8	4.9	5.8	6.9	7.9	8.9	9.9	10.9	11.9
	0.12	18.4	4.4	5.6	6.8	7.9	9.1	10.2	11.4	12.6	13.7
	0.16	30.8	4.8	6.1	7.3	8.6	9.9	11.2	12.4	13.7	15.0

## Air Handling

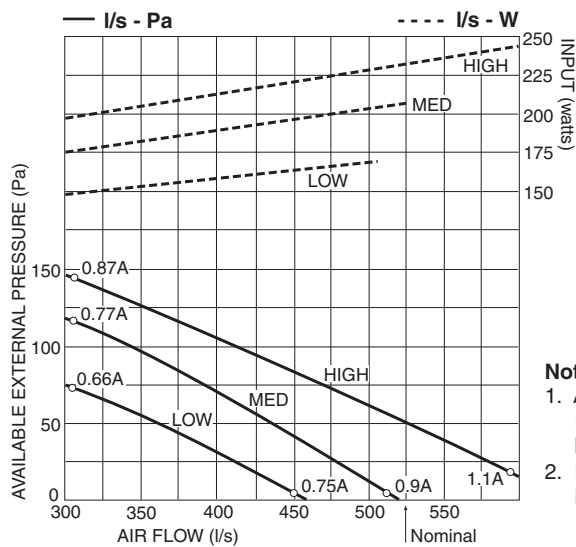

## Sound Levels

Test Conditions: JIS 8616. 1 m ducting with 25 mm insulation. Sound Pressure Levels are at 1 m from source.

FAN SPEED	SPL dB(A)	SWL dB(A)	OCTAVE BAND FREQ. Hz					
			125	250	500	1 k	2 k	4 k
			SOUND POWER LEVELS dB					
LOW	38	48	52	52	47	40	34	24
MED	39	49	53	52	48	42	36	27
HIGH	42	52	54	55	51	45	40	32

Note: Return air plenum, filter and standard supply air spigot attached.

### Note:


- Air flows given are for a standard unit with rectangular supply air spigot and no filter installed. Refer page 53 for filter pressure drop.
- In a free blow application, beware of exceeding indoor fan motor's full load amp limit.

## Dimensions (mm)

Not to Scale

Right Handed models shown

### Standard Unit

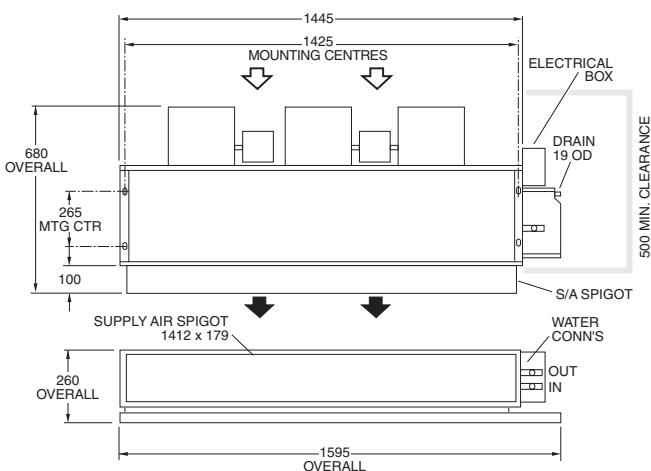

### Standard Unit with Return Air Plenum & Multi-Outlet Supply Air Spigot

